

FIG. 1  
(PRIOR ART)

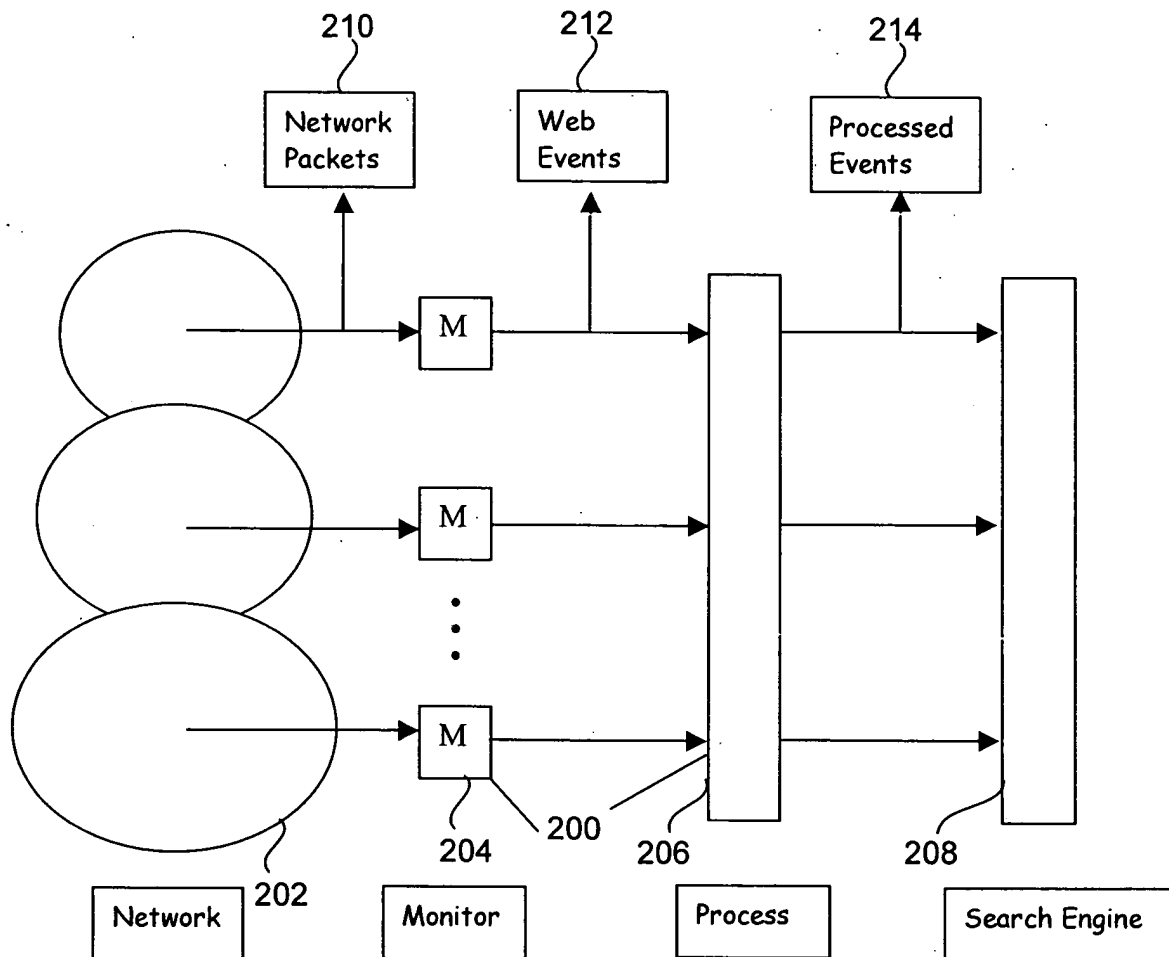


FIG. 2

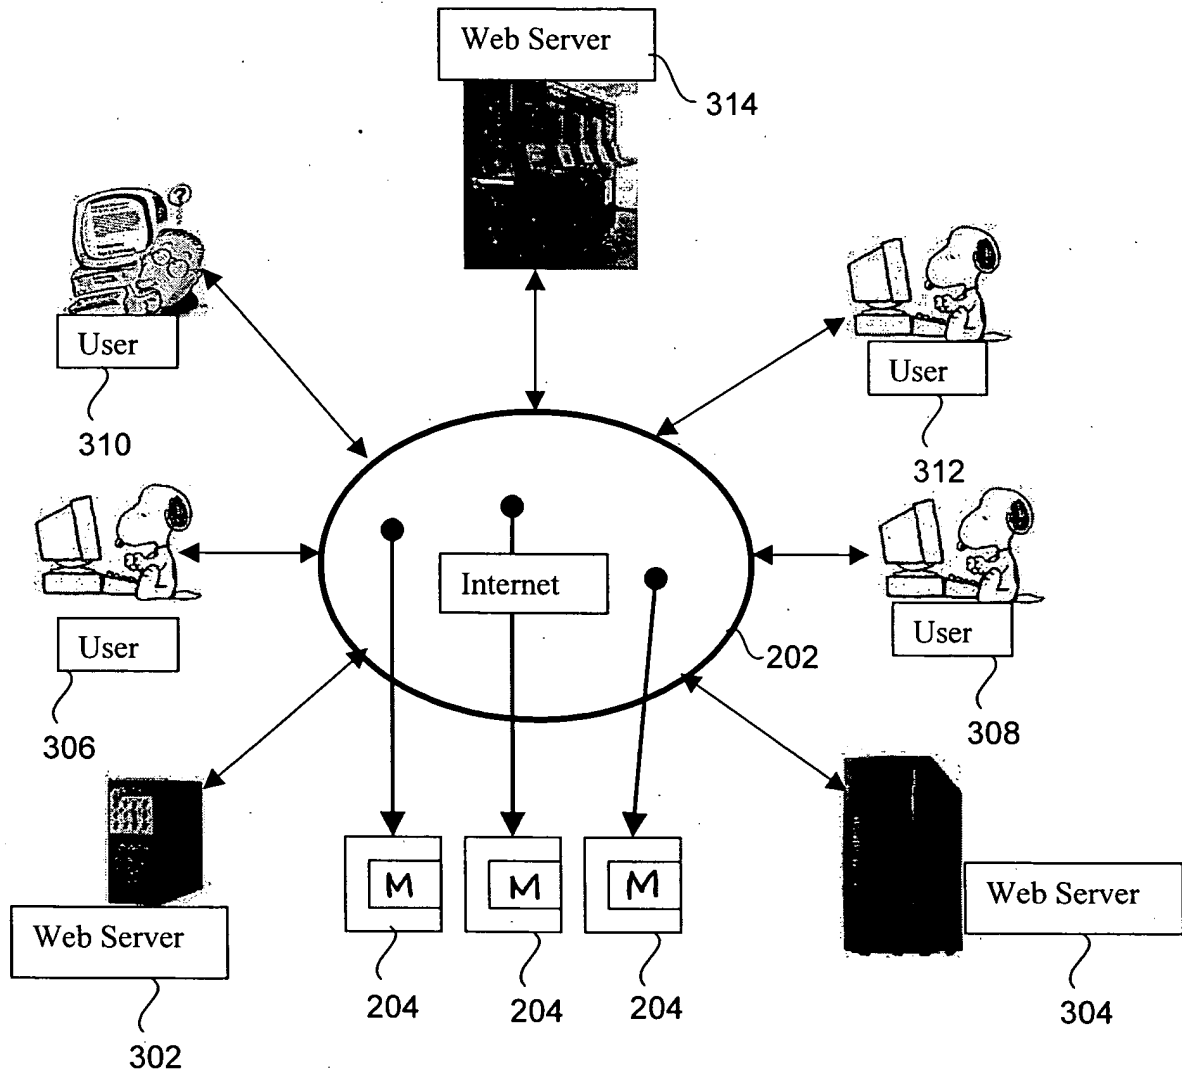


FIG. 3

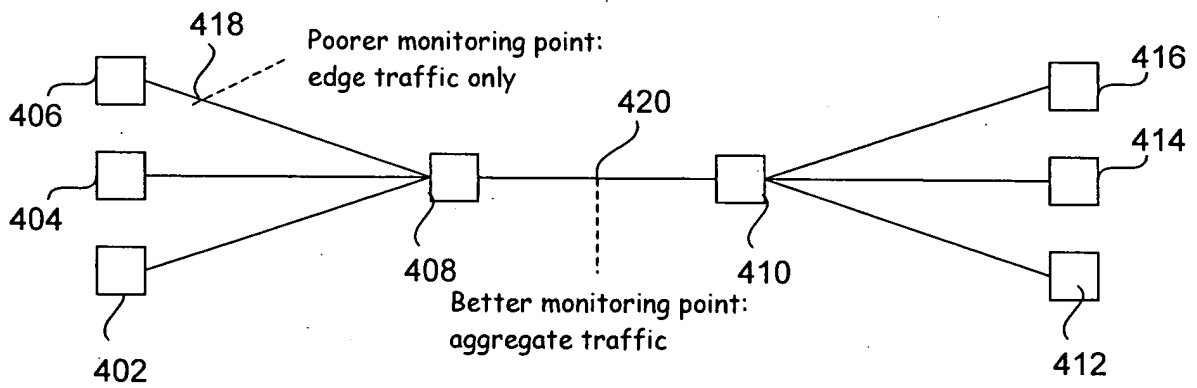


FIG. 4

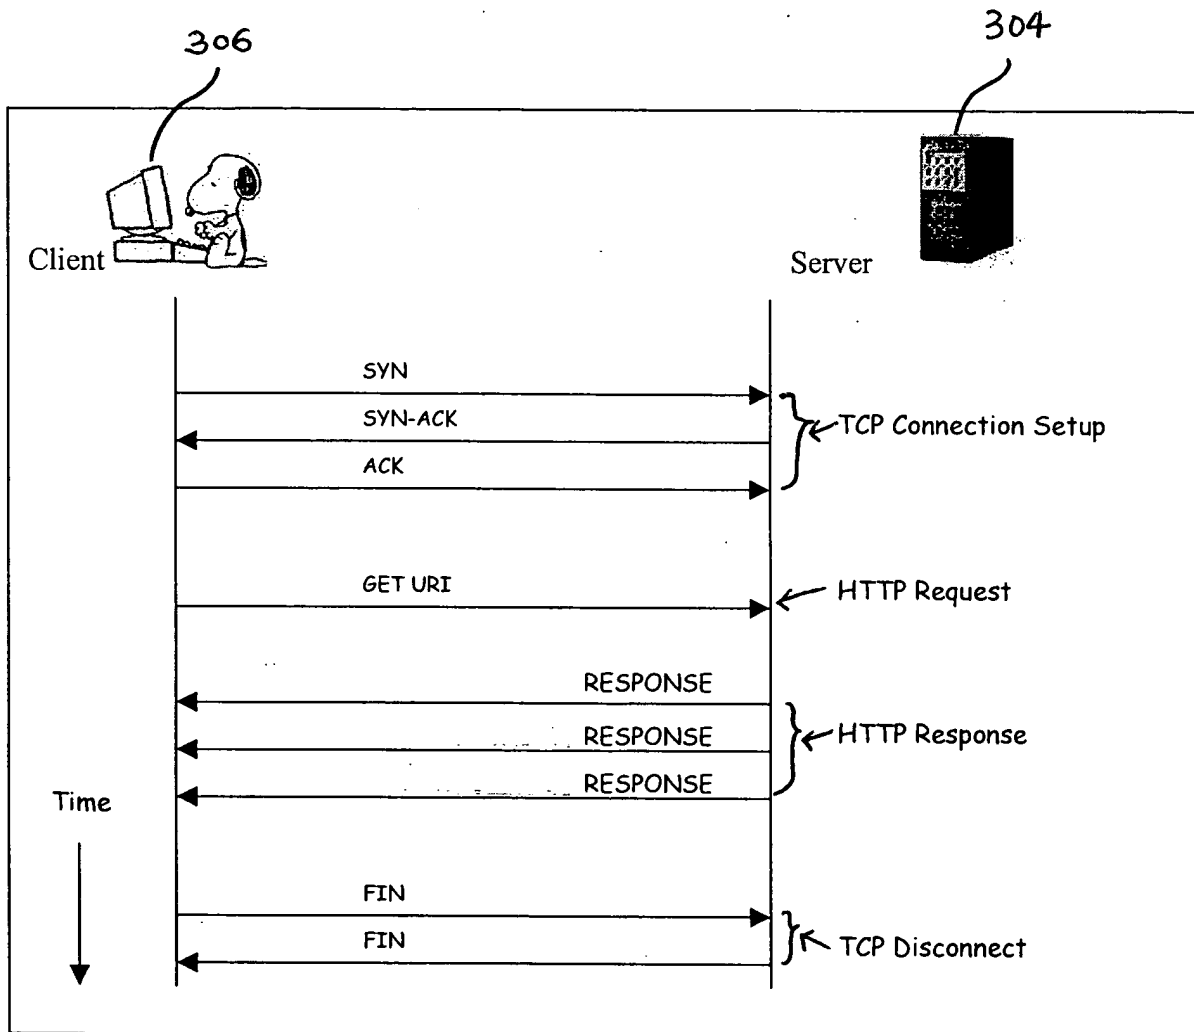


FIG. 5

4-bit version	4-bit header length	8-bit type of service (TOS)						16-bit total length (in bytes)							
16-bit identification								3-bit flags		13-bit fragment offset					
8-bit time to live (TTL)				8-bit protocol <u>602</u>						16-bit header checksum					
32-bit source IP address <u>604</u>															
32-bit destination IP address <u>606</u>															
Options (if any)															
16-bit source port number								16-bit destination port number <u>608</u>							
32-bit sequence number <u>610</u>															
4-bit header length	6-bits (reserved)		U	A	P	R	S	F	16-bit window size						
		R	C	S	S	Y	I								
		G	K	H	T	N	N								
16-bit TCP checksum								16-bit urgent pointer							
Options (if any)															
Data															

614. 612 616

FIG. 6

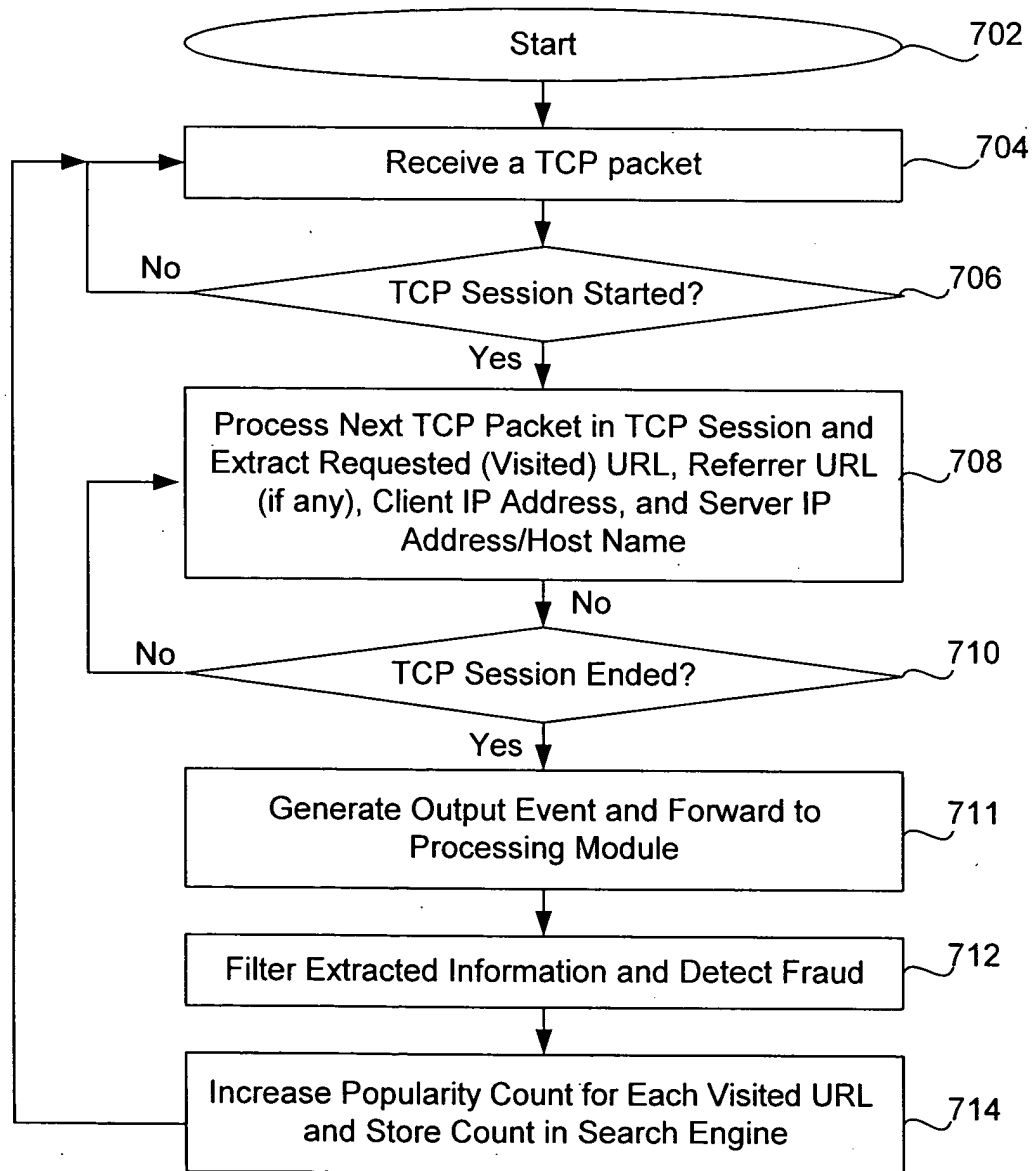


FIG. 7

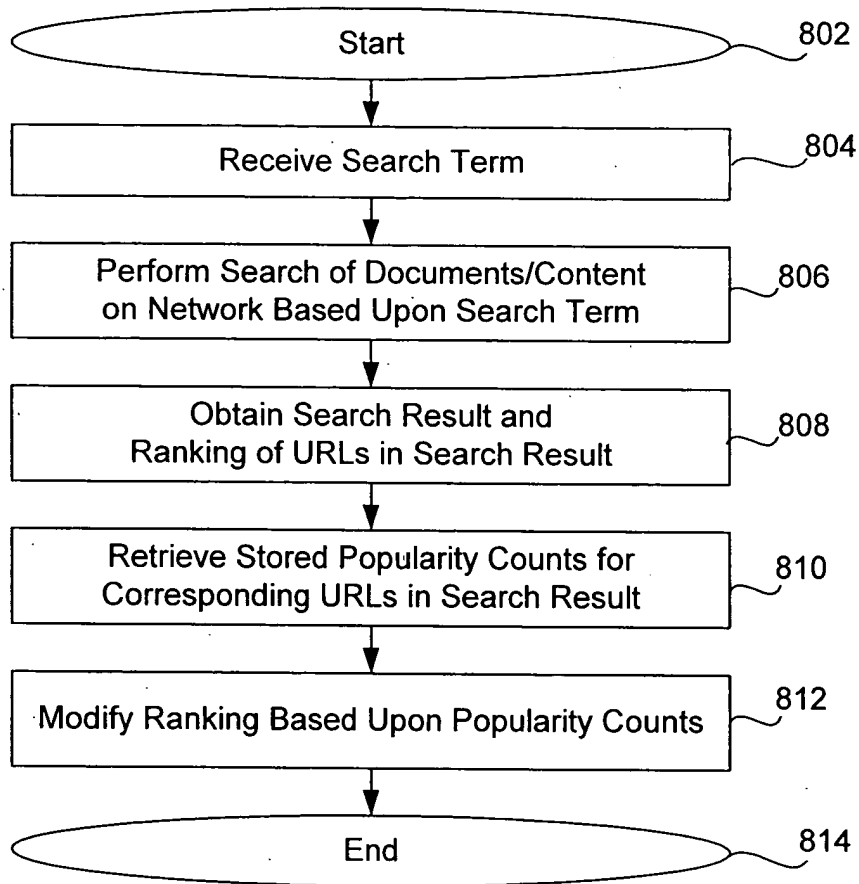


FIG. 8



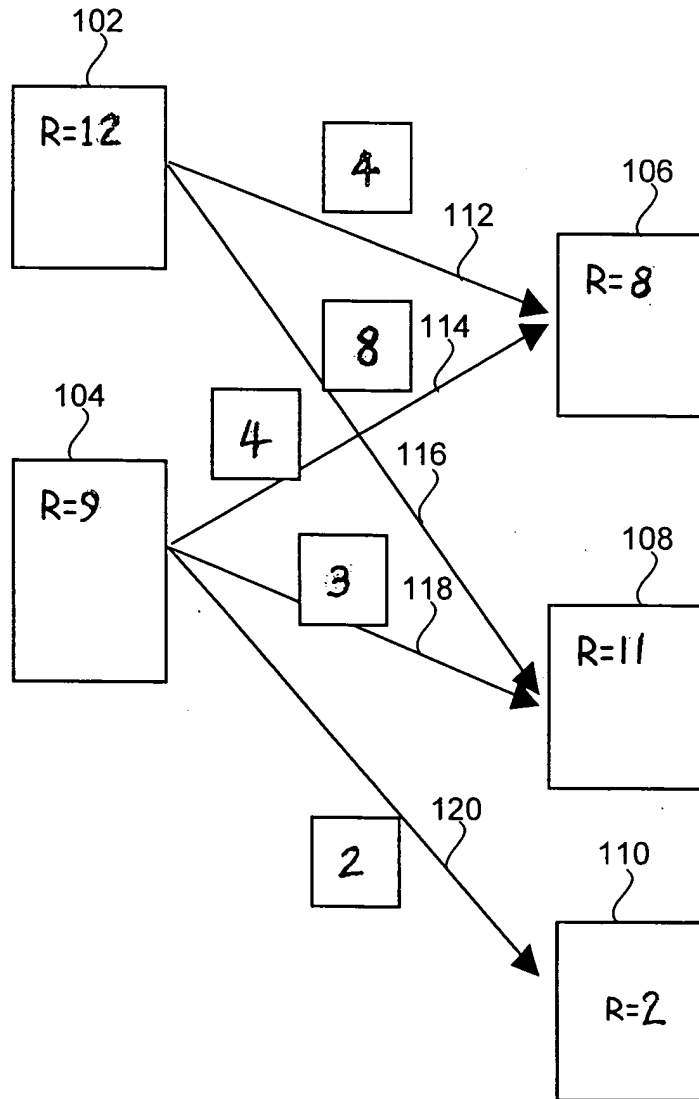


FIG. 9

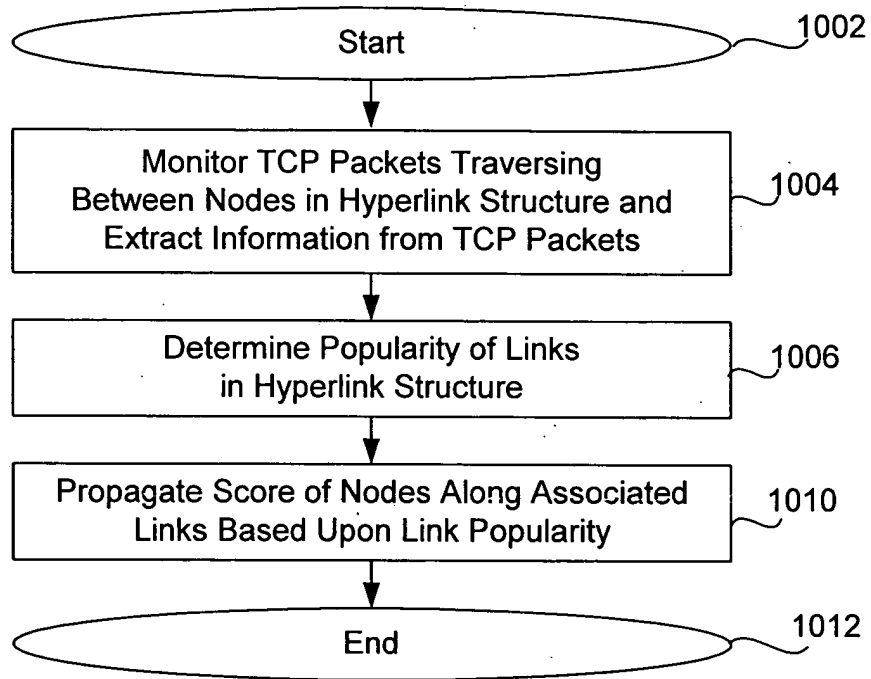


FIG. 10